



Vibratory Feeder Hopper

Series: VFH



**Model Shown
VFH-28**

Electro polished
Stainless Steel
construction
optional

Conical product hopper shown
with optional hopper lid

Sturdy base

3-way
valve
included

Vibratory
Feeding
System

Application: The popular Vibratory Feeder has been incorporated into a hopper and base system which provides a stand-alone feeding system. The VIBRATORY FEEDER HOPPER (VFH Series) can be controlled to provide a constant feed rate or an exact amount for batch processes. Powered by efficient pneumatic drives, the Vibratory Feeding Hopper meets the needs of feeding applications up to 8tph. The simple all stainless steel fabrication is easy to clean, perfect for food, chemical and pharmaceutical applications.

Operation: The quiet and durable Vibratory Feeder is easy to operate. The standard, all stainless steel fabrication, is powered by a corrosion proof, coated drive. The drive and suspension are designed to operate in hazardous or wet environments. No sparks or heat are generated by the pneumatic drive system, which is totally sealed for a safe wash down. The drive system operates at less than 65 dBA. The speed and stroke rate are independently adjusted, providing exact control. The unit is also covered by a 3-year Guarantee.

Got a question about Metal Control
or Material Handling Products...
**Ask the
Magnet
Man**




www.magnetmanusa.com

Magnetic Products, Inc.
Providing Magnetic Solutions for the
Material Handling Industry
800-544-5930



Providing Solutions for the Material Handling Industry

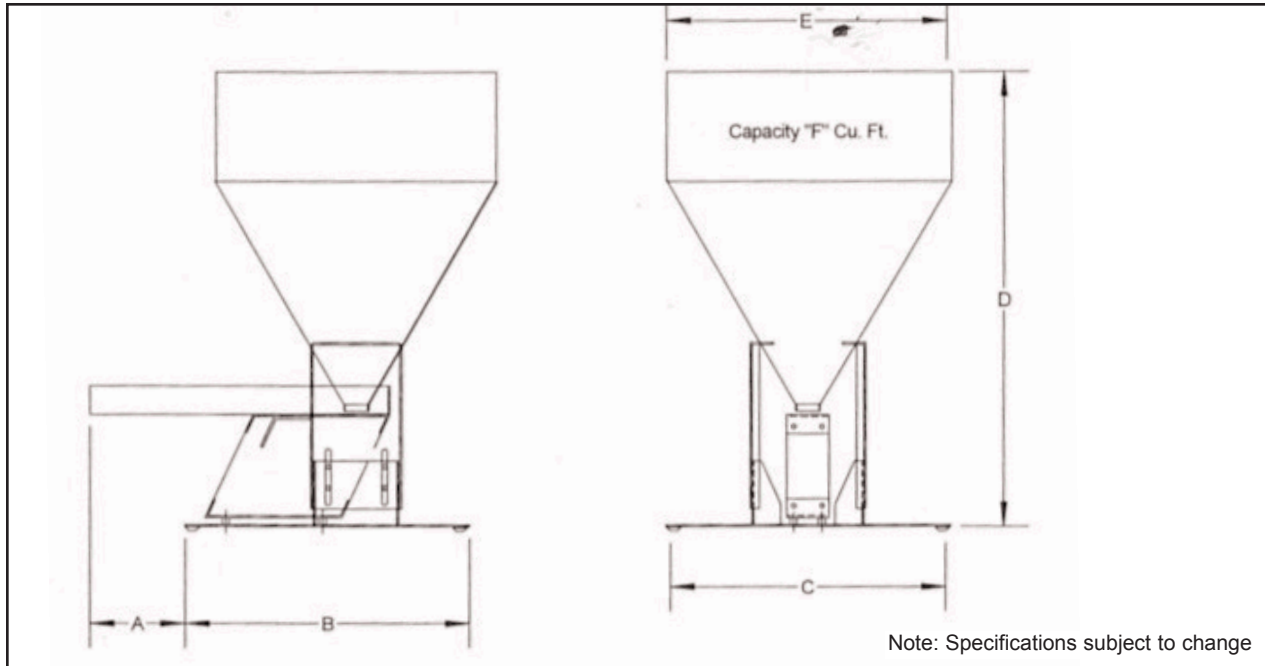

Vibratory Feeding Hopper Selection Guide

| Model | A | B | C | D | E | F (Hopper Capacity) | Weight |
|--------|----|----|----|----|----|---------------------|---------|
| VFH-28 | 10 | 24 | 18 | 28 | 14 | 0.9 | 33 lbs. |
| VFH-34 | 10 | 24 | 18 | 34 | 14 | 1.4 | 37 lbs. |
| VFH-31 | 10 | 24 | 24 | 31 | 20 | 2 | 58 lbs. |
| VFH-36 | 10 | 24 | 24 | 36 | 20 | 2.8 | 65 lbs. |

Standard Features:

- Clean, Sanitary design
- Explosion proof and Waterproof
- Quiet and Energy efficient
- Exact Adjustment
- 3-Year Guarantee
- Fast and Accurate feed rates

Options:

- Custom sizes.
- Drive and suspension only.
- Lubrication free unit
- Electro polished Stainless Steel construction
- Seam welded, food grade construction
- Economical, carbon steel construction

-Custom Sizes & Configurations Available-

For more information, please contact your local sales representative or our customer service representatives

at 1-800-544-5930 or info@mpimagnet.com

Magnetic Products Inc.

P.O. Box 529 • 683 Town Center Dr. • Highland, MI • 48357

TOLL FREE: 800-544-5930 • 248-887-5600

FAX: 248-887-6100

EMAIL: info@mpimagnet.com

www.mpimagnet.com

DISTRIBUTED BY: