



MAGNETIC PRODUCTS, INC.

ENGINEERED METAL CONTROL SOLUTIONS

Liquid Plate Trap

Series: LPT



POWERFUL RARE EARTH
PERMANENT MAGNET MATERIAL

OPTIONAL FLANGE INCLUDES
150# OR THREADS



Application

MPI's Magnetic Liquid Plate Traps are designed to protect liquid and scurry lines and pumps by magnetically removing ferrous contaminants from product streams. LPT Magnets provide purification of liquids and tramp metal separation for a variety of wet food processing industries, from fluid and strained products to viscous and heavy fibrous products.

Operation


A baffle within the trap line directs the product flow toward the magnetic field, such that ferrous contaminants come into contact with the powerful magnet. The area within the trap is enlarged to slow the product stream and allow increased exposure to the entire magnetic surface. Suggested placement of the trap is in horizontal lines, with the magnet element facing "up" to simplify cleaning. After product flow is terminated, the magnet is easily cleaned by removing the tri-clover clamp, lifting the magnetic element and hand-cleaning the surface.

**Specifications subject to change*

Series LPT Version 2.0 © MPI

MPI

683 Town Center Drive, Highland, MI 48356 | p. 248.887.6100
info@mpimagnet.com | www.mpimagnet.com

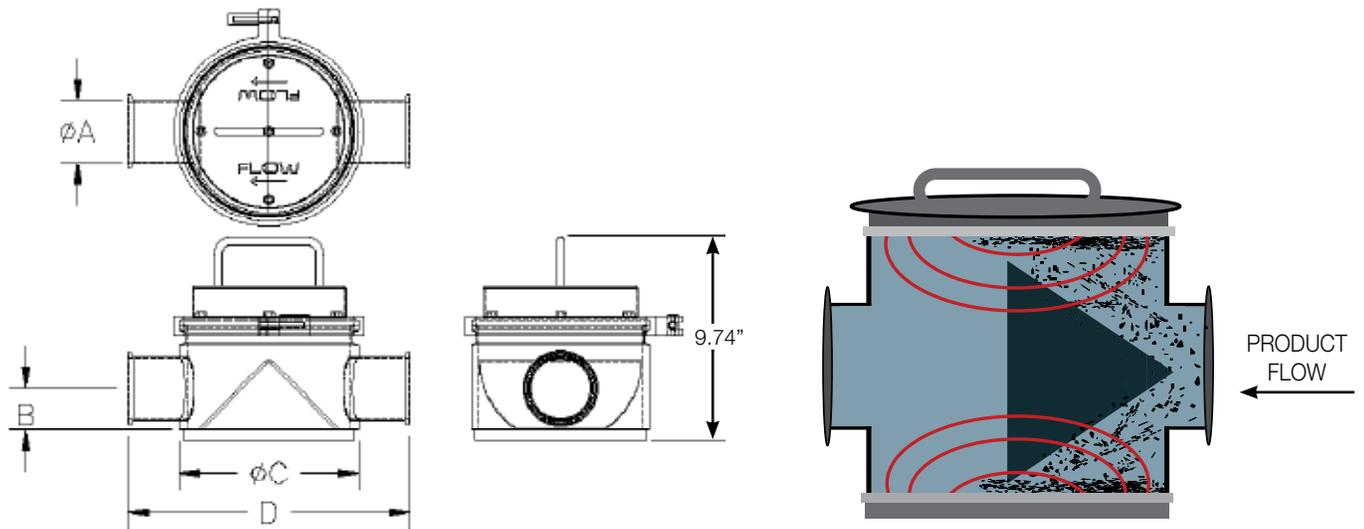

LPT Selection Guide

LPT MODEL NUMBER	PIPE DIAMETER A		CENTERLINE HEIGHT B		BASE DIAMETER C		LENGTH D		APPROX. WEIGHT	
	IN.	MM	IN.	MM	IN.	MM	IN.	MM	LBS.	KG
LPT-15	1.5	38	2.00	51	7.78	198	11.50	292	17	8
LPT-20	2	51	2.00	51	7.78	198	11.50	292	17	8
LPT-25	2.5	64	2.00	51	7.78	198	13.50	343	30	14
LPT-30	3	76	2.00	51	7.78	198	13.50	343	30	14

Capacities

LPT MODEL NUMBER	PRODUCT CLASSIFICATION							
	FLUID & STRAINED		FIBROUS & CRUSHED		VISCIOUS OR HEAVY		VISCIOUS & FIBROUS	
	GPM	LPM	GPM	LPM	GPM	LPM	GPM	LPM
LPT-15	65	245	50	189	25	94	15	57
LPT-20	65	245	50	189	25	94	15	57
LPT-25	140	528	90	339	60	226	35	132
LPT-30	140	528	90	339	60	226	35	132

Standard Features

- Type 304 stainless steel sanitary design and liquid tight construction
- Quick-release triclover clamp for easy inspection and cleaning
- For use in product streams up to 75 psi
- Available for line sizes from 1.5" to 3"

Options

- Other line connection types available: bevel seat, pipe thread, or weld ends
- 316 stainless steel
- USDA finish

*Specifications subject to change

Series LPT Version 2.0 © MPI

MPI

683 Town Center Drive, Highland, MI 48356 | p. 248.887.6100
 info@mpimagnet.com | www.mpimagnet.com