



MAGNETIC PRODUCTS, INC.

ENGINEERED METAL CONTROL SOLUTIONS

Vibratory Feeder

Series VF

THREE-WAY VALVE INCLUDED
(NOT SHOWN)



DURABLE DRIVE AND SUSPENSION

Application

MPI's pneumatically driven vibratory feeders offer an efficient and affordable way to feed materials. The VF series is available in a variety of models and is designed to handle product volumes up to eight (8) TPH. Boasting a compact and sanitary design, MPI's rugged and reliable vibratory feeders are commonly used for foodstuffs, chemicals, or other dry, powder or granular products.

Operation


The quiet and durable vibratory feeder is easy to operate. VF series feeders are fabricated in a sanitary stainless steel design and come complete with an explosion-proof pneumatic feeder motor and a three-way valve with stainless steel mounting base and feeder tray standard. The unit is covered by a one-year guarantee.

**Specifications subject to change*

Series VF Version 3.0 © MPI

MPI

683 Town Center Drive, Highland, MI 48356 | p. 248.887.6100
info@mpimagnet.com | www.mpimagnet.com

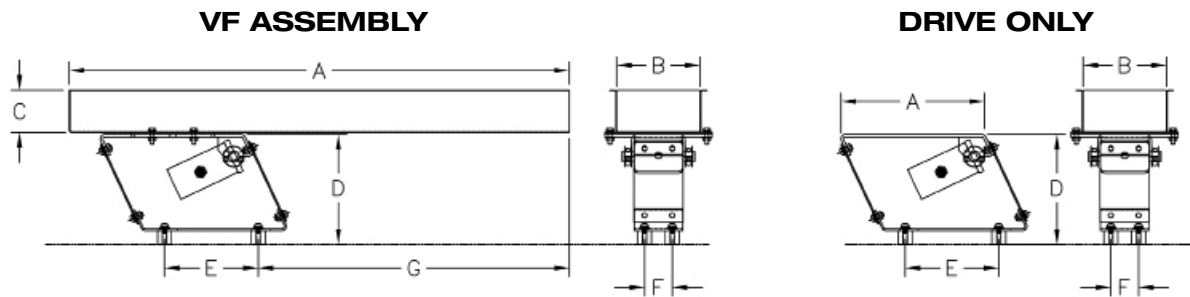

VF Selection Guide

MODEL	CFM	A	B	C	D	E	F	G
<i>UP TO 2 TPH - VF SERIES 2</i>								
VF-2-318	0.81	18	3	2	7.75	6.75	2	9
VF-2-424	0.81	24	4	2	7.75	6.75	2	15
VF-2-620	0.81	20	6	2	7.75	6.75	2	11
DRIVE ONLY	0.81	9.25	3	N/A	7.75	6.75	2	N/A
<i>UP TO 4 TPH - VF SERIES 4</i>								
VF-4-524	1.76	24	5	2	7.75	6.75	3	13
VF-4-618	1.76	18	6	2	7.75	6.75	3	7
VF-4-720	1.76	20	7	2	7.75	6.75	3	9
DRIVE ONLY	1.76	10.8	4	N/A	7.75	6.75	3	N/A
<i>UP TO 8 TPH - VF SERIES 8</i>								
VF-8-636	3.14	36	6	3	7.75	6.75	5	25
VF-8-830	3.14	30	8	3	7.75	6.75	5	19
VF-8-1224	3.14	24	12	3	7.75	6.75	5	13

Custom sizes and configurations are available
All dimensions in inches

Standard Features

- Stainless steel construction
- Clean, sanitary design
- Explosion proof and waterproof
- Quiet and energy efficient
- Exact adjustment
- One-year guarantee
- Fast and accurate feed rates
- Three-way valve control

Options

- Custom sizes
- Drive and suspension only
- Lubrication free unit
Note: Lubrication required for air that is dried by the refrigerant method
- Electro-polished stainless steel construction
- Other options available upon request

*Specifications subject to change

Series VF Version 3.0 © MPI

MPI

683 Town Center Drive, Highland, MI 48356 | p. 248.887.6100
info@mpimagnet.com | www.mpimagnet.com