



Magnetic Products, Inc.
Highland, Michigan | mpimagnet.com

Magnetic Permanent Block (MPB)



- 1 Three magnetic surfaces with different design
- 2 Magnetic block bodies are completely nickel coated for high corrosion prevention
- 3 Steadily clamps flat, circular, square and other sections
- 4 Simple activation by using the switching key

Flexible attachment without disturbing contours for easy drilling, deburring, fine grinding and mounting work

Clamping blocks can be interconnected with a hexagon connector (sold separately) creating larger clamping surface for larger or longer workpieces

One (1) year warranty for the magnetic system

Manufactured in Europe to the highest quality standards

Meets all the requirements of ANSI/ASME B30.20 (safety standard)

Note: sold in pairs

Application: Clamping


Use: Suitable for attaching components during surface machining or welding

Technology: Permanent

Block dimension: from 2.52 x 5.6 x 3 in \ 64 x 143 x 77 mm

Holding force: up to 10kN/cm²

Clamping surfaces: three sides

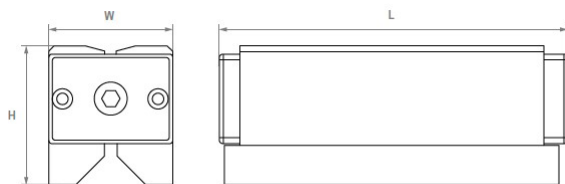

Part Number	Width (IN)	Length (IN)	Height (IN)	Clamping Area 1 (IN)	Clamping Area 2 (IN)	Holding Force (kN)	Weight (LBS)
MPB-500	2.5	5.6	2.8	4.72 x 2.24	5.35 x 2.52	5	17.2
MPB-700	2.5	7	2.8	6.14 x 2.24	6.77 x 2.52	7	21.6
MPB-1000	3.4	7.2	3.5	6.38 x 2.99	7.01 x 3.43	10	38.8

Specifications subject to change • Note: sold in pairs