



XRAY SHARK® XBD40 sideup

X-Ray Inspection System for glass and plastic containers

Cassel GmbH Germany | In der Dehne 10 | 37127 Dransfeld Tel.: +49(0)5502-9115-0 | Fax: +49(0)5502-9115-32 | www.cassel.de



XRAY SHARK® XBD40 sideup

X-Ray Inspection System for glass and plastic container



Advanced Design - Optimal Inspection

Cassel X-ray inspection systems provide maximum sensitivity for detection of foreign bodies and other quality features such as detection of missing or defective products.

The XBD40 sideup is particularly suitable for food or non-food products in glass or plastic containers like jars or bottles. Undesirable contaminants such as metal, stone, ceramic, glass or plastic with high density can be detected in the product.


Made in Germany - High Standards

The superior high-performance software "XIA" makes possible instant analysis and detection with high accuracy and reliability, thus avoiding false rejects. The flawless design offers maximum safety and comfort for daily operations to the quality conscious producer. In this way, Cassel x-ray inspection systems preserve your product quality and provide reliable protection of your brand.

The process control system "SHARKNET®" is optionally available and allows automatic storage of collected operational data and thus complies with certification programs and HACCP requirements.

Easy Cleaning

The hygienic design allows easy cleaning and maintenance of the XBD40 sideup. All components can be disconnected and cleaned. After cleaning, everything can be easily reassembled. The device is thus quickly ready for operation again.

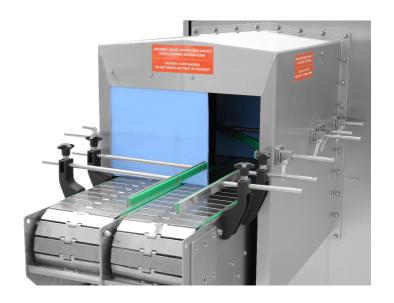

XRAY SHARK® XBD40 - Features at a glance

User-friendly operation

Easy cleaning and maintenance

Real time detection with colored contamination analysis


Masking functions

24 hours non-stop operation

Reliable German safety standard – TÜV-approved

Ethernet and USB

Auto storing of inspection data, with time/date stamp Built-in remote maintenance

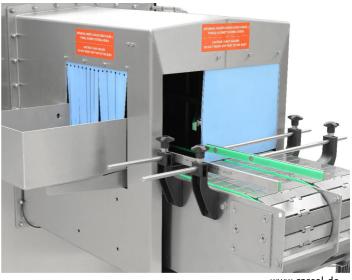

www.cassel.de

XBD40 sideup Data Sheet

Model	XRAY SHARK® XBD40 sideup
X-ray source	Single beam x-ray generator with max. 120kV (400W), Beam shoots sideways through the product Variable in voltage + current, integrated closed oil cooling circuit
Cooling	Highly efficient, silent DC filter fans
X-ray detector	low noise line scan CCD, diode pitch 0.8 mm
Radiation leakage	3 μSv/h or less @ 10cm outside cabinet surfaces
Safety	Special product tunnel, Magnetic safety switches at cabinet doors and tunnel hatches, emergency stop push button, Emergency stop in/out interfaces to safety circuits of production line, x-ray off key switch, PILZ safety circuit
Housing finish	Stainless steel grade AISI 304 / ISO 1.4301 (CrNi 18/10)
Degree of protection	IP54 (according to IEC 60529), including touch panel and fans, product tunnel: IP66
Conveyor type	Modular Chain Link Belt, Stainless Steel
Conveyor speed	Conveyor speed by product, 0,3 to 0,8 m/sec (7 fixed speed steps)
Flow rate	Max. 100 pieces per minute
Max. Product Dimensions	Max. 150mm Ø x 250 mm Height
Product Memory	250 different product set-ups
Display	17" Color-TFT capacitive Touchscreen
Inspection features	Auto Calibration, Auto adaption to density distribution, Density, Hard Contrast, Soft Contrast, Masking Technolog SuperContrast, SizeFilter, AutoEdge, Images AutoSave/Load, Multi Segment Inspection, Metal Foil inspection, Fill Quantit Generator Energy by Product, Password protection
In/Outputs	Programmable outputs (contamination, ready, Emergency Stop) Programmable inputs (Emergency Stop, wake up, optional control signals)
Data Transfer and Reporting	Ethernet for remote support via internet USB for external keyboard/ mouse/ memory stick
Other features	Direct variable conveyor speed by product, Intel Core i, MultiCore CPU, Win OS
Supplied test equipment	Certified test cards with soda lime glass, ceramics, steel spheres in various diameters
Available accessories	Radiation counter, SHARKNET® data management software, pusher systems
Weight	0,9 t
Electrical mains connection	400VAC/3~+N (or 220-240 VAC, depending on Options), 50-60 Hz, ext. Fuse C16A
Compressed air supply	Without reject system 0 (zero)bar With optional reject system minimum 4 bar
Environmental conditions	0 to +30 ° C, with relative humidity max 90% non-condensing Optional: Additional cooling device, for ambient temperature up to 45° C or high humidity environments
Conformity	CE, compliant to German x-ray regulations, specific adaptation for other countries

Metal Detection, Checkweigher and X-Ray



METAL SHARK® GF



WEIGH SHARK® Checkweigher



METAL SHARK® IN MEAT



METAL SHARK® Conveyor



METAL SHARK® IN Liquid





Cassel Messtechnik GmbH (Germany) - Headquarters and main production site

With its production facilities located near Hannover, Germany, Cassel manufactures approximately 1,000 inspection systems annually. Nearly 80 percent of Cassel equipment is exported to the European Union, United States, Southeast Asia, Australia, South Africa and South America. Cassel supplies equipment to several industries, including food production, plastics, pharmaceuticals, textiles, forestry and mining. Cassel machinery can be found in the production lines of many global and respected brands.



Cord Cassel Managing Director of Cassel Messtechnik GmbH

Customers receive valuable service and support wherever their product inspection systems are located around the world. Over 50 representative offices around the globe provide service performed by factory-trained technicians.

Since 1994, Cassel Messtechnik GmbH (Cassel) has led the production machinery industry in the design and construction of metal detection, checkweigher and x-ray inspection systems for industrial applications. Cassel systems specializes in protecting valuable production machinery against damage caused by undiscovered metal parts. Cassel also succeeds in quality control in the consumer goods industry. Cassel strives to supply quality and high performance at a reasonable price.